

DS-2CE16D0T-ITPFS
2 MP Audio Fixed Mini Bullet Camera




- 2 MP coaxial audio camera
- Enhancing safety with discreet and economical built-in microphone
- Transmits audio over the coaxial cable
- EXIR 2.0: advanced infrared technology with 25 m IR distance
- Water and dust resistant (IP67)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS)

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.01 Lux @ (F2.0, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Day & Night	ICR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm, 3.6 mm, 6 mm fixed lens
Focal Length & FOV	2.8 mm, horizontal FOV: 106.4°, vertical FOV: 57.9°, diagonal FOV: 124.6° 3.6 mm, horizontal FOV: 79.6°, vertical FOV: 43.5°, diagonal FOV: 93.7° 6 mm, horizontal FOV: 51.9°, vertical FOV: 30°, diagonal FOV: 58.8
Lens Mount	M12
Image	
Image Parameters Switch	STD/HIGH-SAT
Image Settings	Brightness, Sharpness, Mirror, Smart IR
Frame Rate	TVI: 1080P@30fps, 1080P@25fps AHD: 1080P@30fps, 1080P@25fps CVI: 1080P@30fps, 1080P@25fps CVBS: PAL/NTSC
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	Yes
Image Enhancement	Yes
White Balance	Auto/Manual
AGC	Support
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Material	Plastic
Dimension	138.8 mm × 60.9 mm × 57.9 mm (5.46" × 2.40" × 2.28")
Weight	Approx. 160 g (0.35 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Communication	HIKVISION-C
Language	English
Power Supply	12 VDC ± 25%
Consumption	Max. 2.7 W
IR Range	Up to 25 m
Approval	
Protection	IP67

▪ Dimension

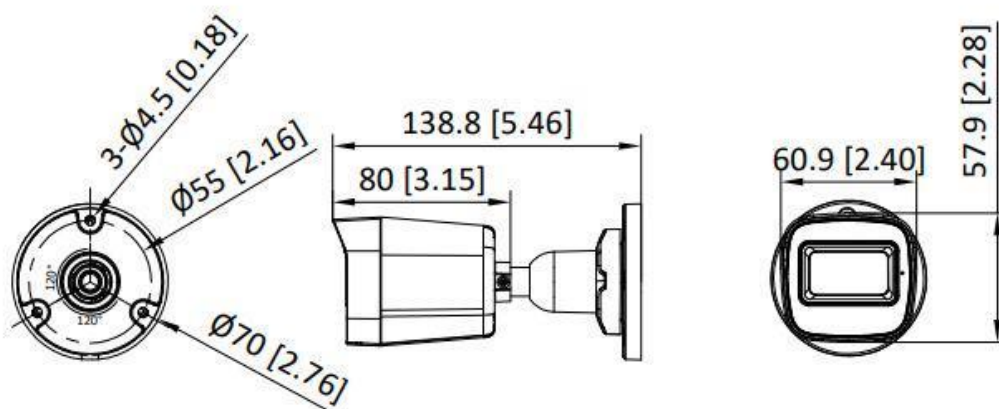

▪ **Accessory**

▪ **Optional**


DS-1280ZJ-XS



▪ **Installation Methods**

Junction Box

DS-1280ZJ-XS



See Far, Go Further



www.hikvision.com
support@hikvision.com

