

## DS-9632NXI-I8/S 32-ch 2U 4K AcuSense NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch perimeter protection
- Up to 1-ch facial recognition for video stream, or up to 4-ch facial recognition for face picture
- Up to 32-ch IP camera inputs
- Up to 16-ch 1080p decoding capability
- Up to 320 Mbps incoming bandwidth
- Up to 8-ch IP speakers can be connected

#### \*Compression and Recording

- \* H.265+ compression effectively reduces the storage space by up to 75%
- \* Full channel IP cameras connection
- \* Compatible to third-party network cameras

#### \*HD Video Output

- \* Provide independent HDMI and VGA outputs
- \* HDMI video output at up to 4K resolution

#### \*Storage and Playback

- \* Up to 8 SATA interfaces for HDD connection
- \* 16-ch synchronous playback

#### \*Smart & POS Function

- \* Support multiple VCA (Video Content Analytics) events
- \* Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- \* POS information overlay on live view and playback
- \* POS triggered recording and alarm

#### \*Network & Ethernet Access

- \* 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- \* Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management

## ▪ Specification

Devices and Servers	
Heat Map Cameras	1.heatmap data record and presentation
Intelligent Analytics	
AI by NVR	DS-9632NXI-I8/S:Facial recognition, perimeter protection, motion detection 2.0 DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Facial recognition, perimeter protection, motion detection 2.0
AI by Camera	DS-9632NXI-I8/S:Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Facial recognition, perimeter protection, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA
Engine	DS-9632NXI-I8/S:1, engine mode is adjustable DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1, engine mode is adjustable
Perimeter Protection	
Human/Vehicle Analysis	DS-9632NXI-I8/S:Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition; Up to 12 rules in total DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):N/A DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:Up to 4-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition; Up to 12 rules in total
By NVR	DS-9632NXI-I8/S:4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total
By Camera	DS-9632NXI-I8/S:All channels DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):All channels

Facial Recognition	
Facial Detection and Analytics	DS-9632NXI-I8/S:Face picture comparison, human face capture, face picture search DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Face picture comparison, human face capture, face picture DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:Face picture comparison, human face capture, face picture search
Face Picture Library	DS-9632NXI-I8/S:Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 15KB, total capacity ≤ 150 MB) DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:Up to 16 face picture libraries, with up to 10,000 face pictures in total (each picture ≤ 15KB, total capacity ≤ 150 MB)
Facial Detection and Analytics Performance	DS-9632NXI-I8/S:1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265) DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:1-ch human face capture (HD network camera, up to 8 MP, H.264/H.265) DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):4-ch human face capture (HD network camera, up to 8 MP, H.264/H.265)
Face Picture Comparison	DS-9632NXI-I8/S:4-ch face picture comparison alarm DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):8-ch DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:4-ch face picture comparison alarm
Motion Detection 2.0	
Human/Vehicle Analysis	DS-9632NXI-I8/S:32-ch DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):N/A DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:32-ch
By NVR	DS-9632NXI-I8/S:All channels for Hikvision cameras DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):All channels for Hikvision cameras
By Camera	DS-9632NXI-I8/S:All channels DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):All channels

ANPR	
By Camera	<p>DS-9632NXI-I8/S:All channels</p> <p>Support Countries &amp; Regions:</p> <ol style="list-style-type: none"> <li>1. Myanmar, Philippines, Indonesia, Vietnam, Pakistan, New Zealand, Australia, Sri Lanka, Singapore, Malaysia</li> <li>2. Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, The United Kingdom, Ireland, Germany, Italy, Austria, Palestine, Latvia, Lithuania, Estonia, Belgium, Luxembourg, Ukraine, Uzbekistan, Kazakhstan, Mongolia, Moldova, Kyrgyzstan, Azerbaijan, Georgia, Armenia, Albania, Kosovo, Belarus, Cyprus, Denmark, Finland, Malta, Portugal, Romania, Slovenia, Sweden, Israel, Bosnia and Herzegovina, Turkmenistan, Montenegro, Serbia, Tajikistan, Iceland, Liechtenstein</li> <li>3. Argentina, Brazil, Chile, Colombia, Peru, Ecuador, Paraguay, Uruguay, Salvador, Bolivia, Canada, Algeria, Mexico, Panama, Costa Rica, Nigeria, Kenya, Mauritius, Tanzania, Cote d'Ivoire, South Africa, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Republic of Trinidad and Tobago, Dominica, Guatemala, Senegal, Algeria, Cameroon</li> <li>4. Qatar, Kuwait, Oman, Jordan, Lebanon, Iraq, United Arab Emirates, Saudi Arabia, Bahrain, Egypt, Libya</li> </ol> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):All channels</p>
Vehicle Attributes	<p>DS-9632NXI-I8/S:Vehicle brand, vehicle color, vehicle type</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Plate number, license plate color, license plate type</p>
Plate Attributes	<p>DS-9632NXI-I8/S:Plate number, license plate color, license plate type</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Vehicle brand, vehicle color, vehicle type</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p>
Video and Audio	
IP Video Input	<p>DS-9632NXI-I8/S:32-ch</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):32-ch</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:32-ch</p> <p>Up to 12 MP resolution</p> <p>*: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.</p>
Incoming Bandwidth	<p>DS-9632NXI-I8/S:320 Mbps</p> <p>320 Mbps</p>
Outgoing Bandwidth	<p>256 Mbps</p>

HDMI 1 Output	<p>DS-9632NXI-I8/S:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz</p>
HDMI 2 Output	<p>DS-9632NXI-I8/S:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz</p>
VGA 1 Output	<p>DS-9632NXI-I8/S:1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1920 × 1080/60 Hz</p>
VGA 2 Output	<p>DS-9632NXI-I8/S:1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1920 × 1080/60 Hz</p>
Video Output Mode	<p>DS-9632NXI-I8/S:HDMI1/VGA simultaneous output, HDMI2/VGA independent output</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:HDMI1/VGA simultaneous output, HDMI2/VGA independent output</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):HDMI1/VGA1 simultaneous output, HDMI2/VGA2 simultaneous output,HDMI1/HDMI2 independent output</p>
CVBS Output	<p>DS-9632NXI-I8/S:1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480</p>
Audio Output	<p>DS-9632NXI-I8/S:2-ch, RCA (Linear, 1 KΩ)</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):2-ch, RCA (Linear, 1 KΩ)</p>
Two-Way Audio	<p>1-ch, RCA (2.0 Vp-p, 1 KΩ)</p>

Decoding	
Recording Resolution	DS-9632NXI-I8/S:32 MP/24 MP/16MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs. DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs.
Live View Window Division	DS-9632NXI-I8/S:1/2/4/6/8/9/16/25/32/36 DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1/2/4/6/8/9/16/25/32/36
Aux Port Window Division	DS-9632NXI-I8/S:1/2/4/6/8/9/16/25/32/36 DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1/2/4/6/8/9/16/25/32/36
Dual-Stream Recording	DS-9632NXI-I8/S:Support DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Support
Audio Compression	DS-9632NXI-I8/S:G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM
Decoding Format	DS-9632NXI-I8/S:H.265+/H.265/H.264+/H.264/MPEG4 DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):H.265+/H.265/H.264+/H.264 DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:H.265+/H.265/H.264+/H.264/MPEG4


Decoding Capability	<p>DS-9632NXI-I8/S:Enable AI by NVR: 20-ch@1080p (30 fps)  1-ch@32 MP (30 fps); 1-ch@24 MP (30 fps); 2-ch@16MP (30 fps); 3-ch@12MP (30 fps);5-ch@8 MP (30 fps); 6-ch@6 MP (30 fps);8-ch@5 MP (30 fps);10-ch@4 MP (30 fps);16-ch@2 MP (30 fps);</p> <p>Disable AI by NVR: 32-ch@1080p (30 fps)  2-ch@32 MP (30 fps); 2-ch@24 MP (30 fps); 4-ch@16MP (30 fps); 5-ch@12MP (30 fps);8-ch@8 MP (30 fps); 8-ch@6 MP (30 fps); 12-ch@5 MP (30 fps); 16-ch@4 MP (30 fps);</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:16-ch@1080p (30 fps)</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps)</p>
Synchronous Playback	<p>DS-9632NXI-I8/S:32-ch</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:32-ch</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):16-ch</p>
Stream Type	Video, Video & Audio
<b>Network</b>	
API	<p>DS-9632NXI-I8/S:ONVIF (profileS/G); SDK; ISAPI</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):ONVIF (profileS/G); SDK; ISAPI</p>
Compatible Browser	<p>DS-9632NXI-I8/S:IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:N/A</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version</p>
Network Protocol	<p>DS-9632NXI-I8/S:TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP</p> <p>TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS</p>
Remote Connection	128
Network Interface	DS-9632NXI-I8/S:2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface 2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Camera Access Protocol	ONVIF(Version 2.5), RTSP
<b>RAID</b>	
RAID Type	<p>DS-9632NXI-I8/S:RAID0, RAID1, RAID5, RAID6, RAID10</p> <p>RAID and AI functions are mutually exclusive.</p> <p>DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):RAID0, RAID1, RAID5, RAID6,</p> <p>RAID10 Support global hot spare</p> <p>DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋</p> <p>SIRA:RAID0, RAID1, RAID5, RAID6, RAID10</p>

Auxiliary Interface	
SATA	8 SATA interfaces
eSATA	1 eSATA interface
Capacity	DS-9632NXI-I8/S:Up to 16 TB capacity for each disk DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Up to 14 TB capacity for each disk DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:Up to 10 TB capacity for each disk
Serial Interface	DS-9632NXI-I8/S:RS-485 (full-duplex), RS-232, Keyboard DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:RS-485 (full-duplex), RS-232, Keyboard DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):1 RS-485 (full-duplex), 1 RS-232
USB Interface	DS-9632NXI-I8/S:Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0 DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm In/Out	DS-9632NXI-I8/S:16/8 DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):16/9 DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:16/8
Ctrl 12V	DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:NA DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9.
DC 12V	DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):12 VDC, 1 A power output DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:NA


General	
GUI Language	DS-9632NXI-I8/S:English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:N/A DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	DS-9632NXI-I8/S:≤ 30 W DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:≤ 30 W DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):≤ 30 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Chassis	2U chassis
Dimension (W × D × H)	DS-9632NXI-I8/S:442 × 459 × 92 mm (17.4"× 18" × 3.6") DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):445 × 460 × 93 mm (17.5"× 18.1" × 3.7") DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:442 × 459 × 92 mm (17.4"× 18" × 3.6")
Weight	DS-9632NXI-I8/S:≤ 8.7 kg (19.2 lb.) DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):≤ 8.3 kg (18.3lb.) DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:≤ 8.7 kg (19.2 lb.)
Certification	
FCC	DS-9632NXI-I8/S:Part 15 Subpart B, ANSI C63.4-2014 DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):N/A DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:Part 15 Subpart B, ANSI C63.4-2014
CE	DS-9632NXI-I8/S:EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4
Obtained Certification	DS-9632NXI-I8/S:CE, FCC, IC DS-9632NXI-I8/S(标配)(C),DS-9632NXI-I8/S(中性)(C),DS-9632NXI-I8/S(标配)(C)/阿联酋 SIRA:CE, FCC, IC DS-9632NXI-I8/S(标配)(E),DS-9632NXI-I8/S(中性)(E):CE, CB, REACH, WEEE, UKCA, LOA

## ▪ Physical Interface

No.	Description	No.	Description
1	eSATA interface	8	USB 3.0 interface
2	LAN1/LAN2 interface	9	ALARM IN
3	AUDIO IN/OUT	10	ALARM OUT, RS-485, Ctrl 12 V and DC 12 V
4	AUDIO/VIDEO OUT	11	GND
5	HDMI1/HDMI2 interface	12	100 to 240 VAC power supply
6	VGA1/VGA2 Interface	13	Power switch
7	RS-232 interface		

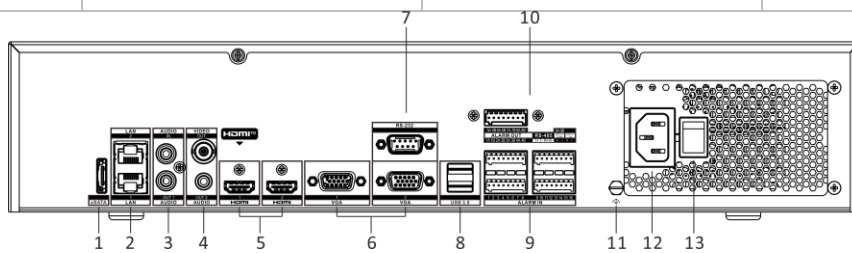

## ▪ Dimension

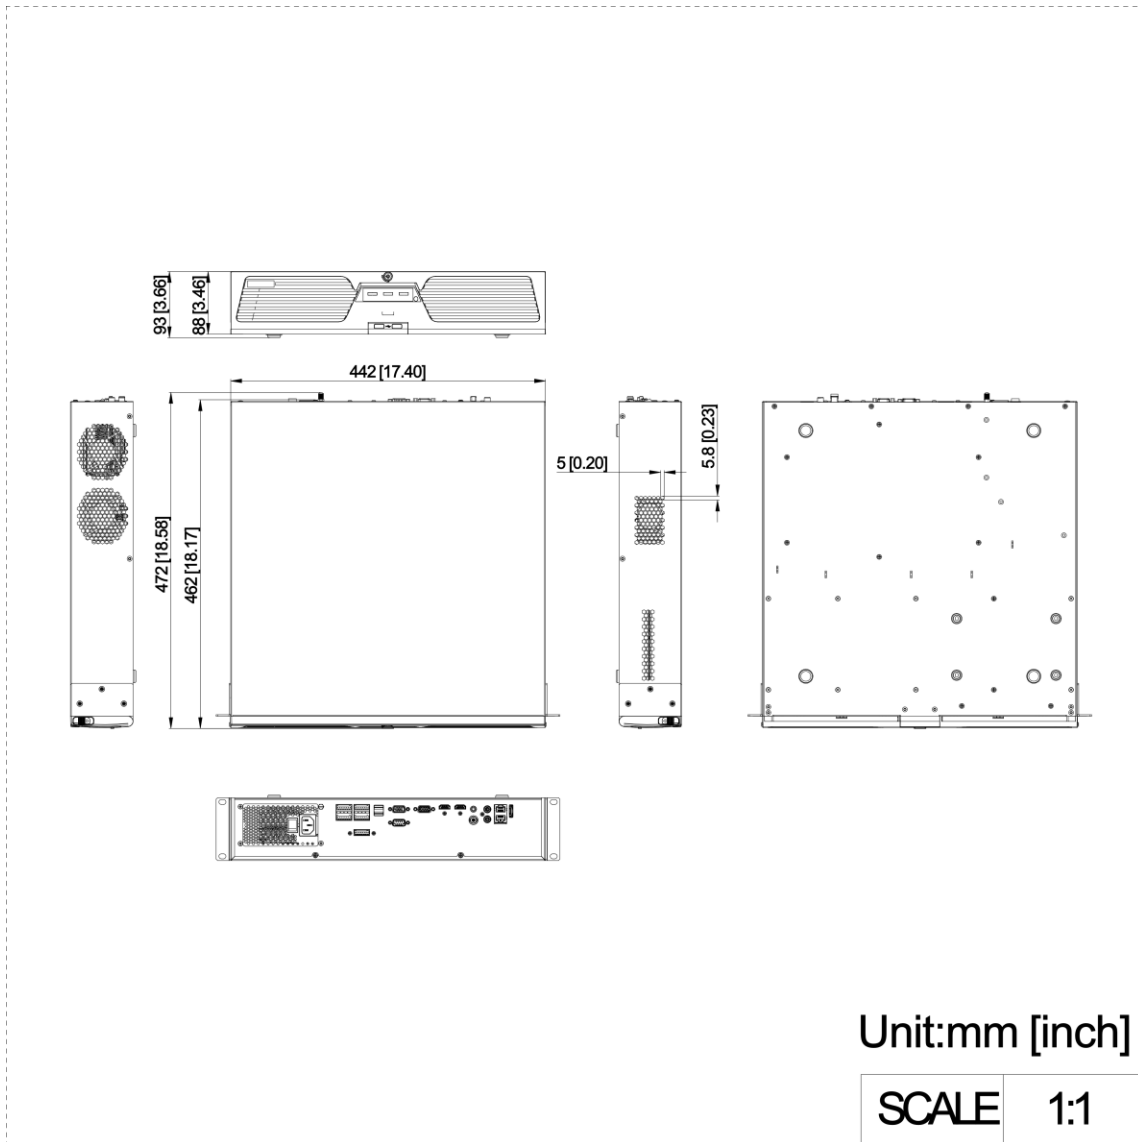

▪ Accessory

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

